



MAXI**CHARGER**™ AC WALLBOX**COMMERCIAL**

LEVEL 2 ELECTRIC VEHICLE CHARGER
SPECIFICATIONS

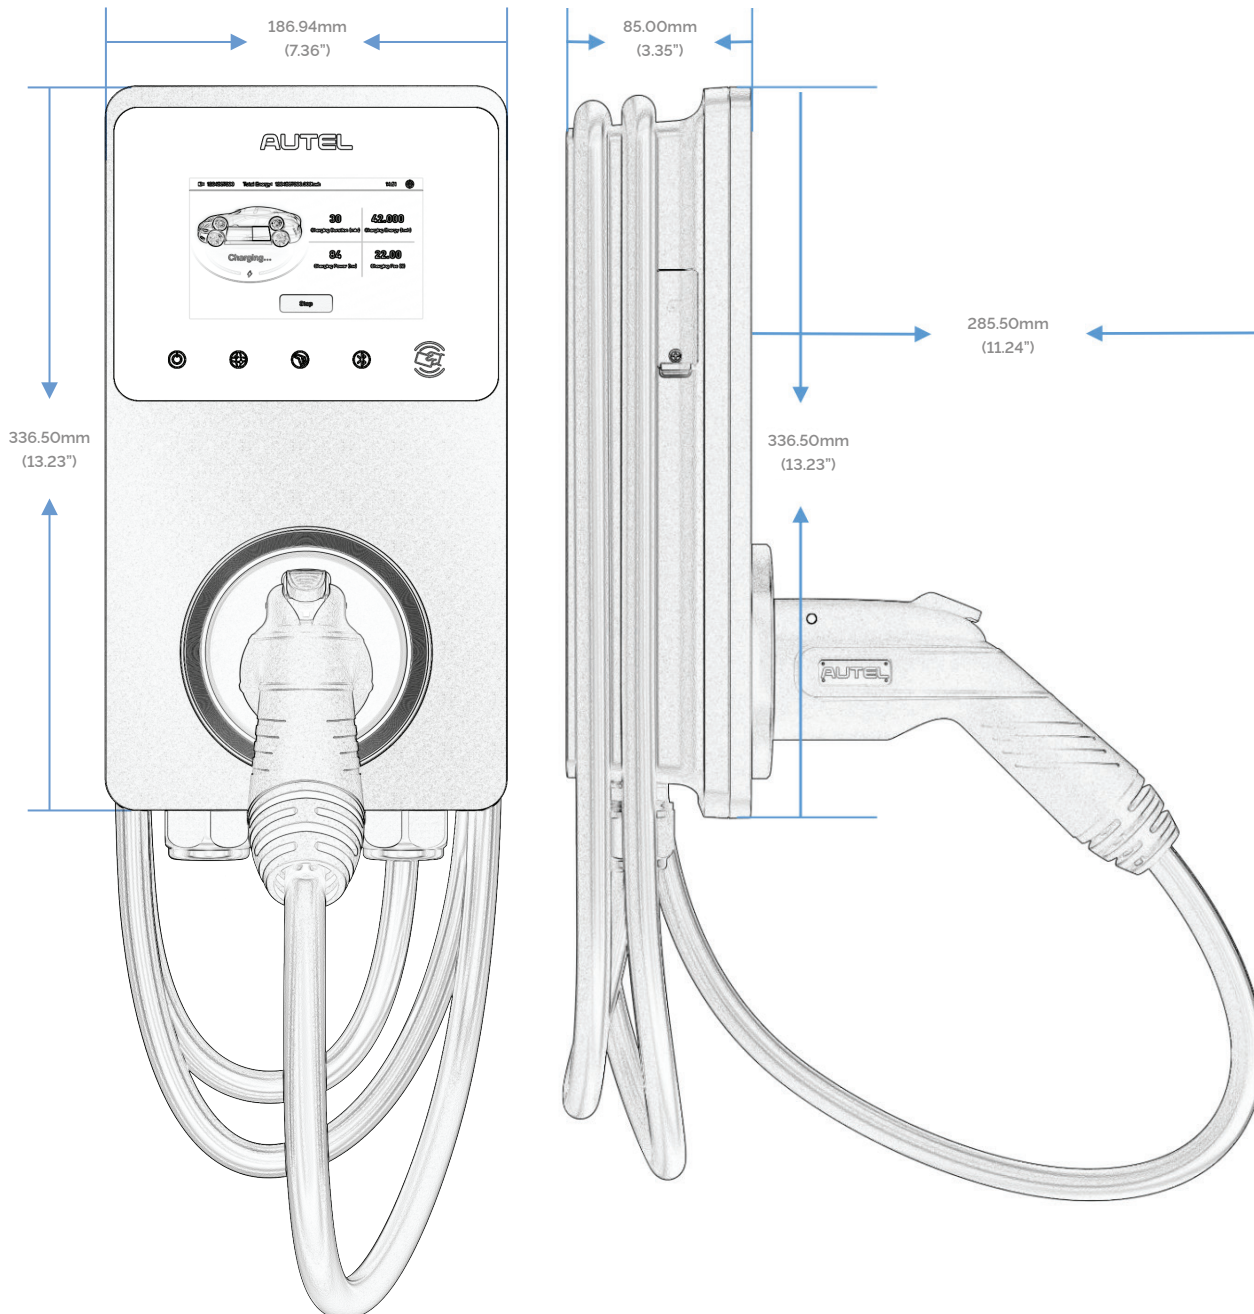

AUTEL® MAXICHARGER™ AC WALLBOX COMMERCIAL

LEVEL 2 ELECTRIC VEHICLE CHARGER



SPECIFICATIONS

POWER

INPUT/OUTPUT POWER RATING & CURRENT	12kW (240V AC*50A)
INPUT/OUTPUT VOLTAGE	208V±15%; 240V±15%, 60Hz
NETWORK TYPE	L1/N+PE, L1/L2/PE
INPUT CORD	Hardwired
CONNECTOR TYPE	SAE J1772, 25ft (7.5m)
GROUND FAULT DETECTION	20mA CCID
PROTECTION	Overcurrent, Overvoltage, Undervoltage, Integrated Surge Protection
POWER MEASUREMENT ACCURACY	Full Scale

OPERATIONAL RATINGS

ENCLOSURE RATING	NEMA 4
OPERATING TEMPERATURE RANGE	-40°F ~+131°F (-40°C ~+55°C)
STORAGE TEMPERATURE RANGE	-40°F ~+185°F (-40°C ~+85 °C)
MOUNTING	Wall Or Floor Using A Pedestal
DIMENSIONS (H×W×D)	336×187×85mm

USER INTERFACE

STATUS INDICATION	LED/APP/Touch Screen (5 Inch LCD, 800*480)
USER INTERFACE	Autel Charge APP; Autel Charge Cloud
CONNECTIVITY	Bluetooth, Wi-Fi, Ethernet, 4G, CAN, RS485
COMMUNICATION PROTOCOLS	OCPP 1.6J (Can Be Upgraded To OCPP 2.0.1 Later)
USER AUTHENTICATION	APP, RFID Card
CARD READER	ISO 15693, ISO 14443, NFC
SOFTWARE UPDATE	OTA

CERTIFICATION & STANDARDS

SAFETY & COMPLIANCE	UL 2231-1, UL 2231-2, UL2594, NEC Article 625, CSA C22.2, UL 916
EMC COMPLIANCE	FCC 15 Class B
CERTIFICATION	Energy Star, OpenADR 2.0b
WARRANTY	36 Months, Warranty Extension Available

DESCRIPTION	PART NO.	MODEL NO.	POWER SUPPLY
-------------	----------	-----------	--------------

MAXICHARGER COMMERCIAL C50

MCC50AHI

MAXI US AC W12-L-4G

HARDWIRED

