


AUTEL[®] MAXICHARGER[™] AC WALLBOXHOME LEVEL 2 ELECTRIC VEHICLE CHARGER

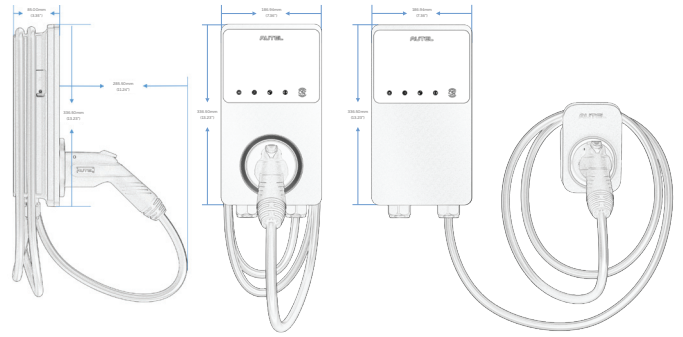

SPECIFICATIONS

POWER

INPUT/OUTPUT POWER RATING & CURRENT	9.6kW (240V AC*40A) Or 12kW (240V AC*50A) Output Amperage Adjustable Via Mobile App, From 6A To 40A Or 50A
INPUT/OUTPUT VOLTAGE	208V±15%; 240V±15%, 60Hz
NETWORK TYPE	L1/N+PE, L1/L2/PE
CONNECTOR TYPE	SAE J1772, 25ft (7.5m)
GROUND FAULT DETECTION	20mA CCID
PROTECTION	Overcurrent, Overvoltage, Undervoltage, Integrated Surge Protection
POWER MEASUREMENT ACCURACY	+/- 1.0% From 1% To Full Scale
POWER CORD	NEMA 6-50 / NEMA 14-50 / Hardwired

OPERATIONAL RATINGS

ENCLOSURE RATING	NEMA 4
OPERATING TEMPERATURE RANGE	-40°F ~+131°F (-40°C ~+55°C)
STORAGE TEMPERATURE RANGE	-40°F ~+185°F (-40°C ~+85 °C)
MOUNTING	Wall Or Floor Using A Pedestal
DIMENSIONS (H*W*D)	13x7x3in (336x187x85mm)
WEIGHT TOTAL (INCLUDES CHARGER, GABLE, GUN & HOLSTER)	Ranges Between 13lbs. (5.9 kg) - 15.9 lbs. (7.2 kg) Based On Model

USER INTERFACE

STATUS INDICATION	LED/APP
USER INTERFACE	Autel Charge APP; Autel Charge Cloud
CONNECTIVITY	Bluetooth, Wi-Fi, Ethernet, CAN, RS485 (For Energy Meter Connection)
COMMUNICATION PROTOCOLS	OCPP 1.6J (Can Be Upgraded To OCPP 2.0.1 Later)
USER AUTHENTICATION	APP, AutoStart, RFID Card
CARD READER	Optional: ISO 15693, ISO 14443, NFC
SOFTWARE UPDATE	OTA

CERTIFICATION & STANDARDS

SAFETY & COMPLIANCE	UL 2231-1, UL 2231-2, UL2594, NEC Article 625, CSA C22.2, UL 916
EMC COMPLIANCE	FCC 15 Class B
CERTIFICATION	Energy Star, OpenADR 2.0b
WARRANTY	36 Months

DESCRIPTION	PART NO.	MODEL NO.	POWER SUPPLY	DESCRIPTION	PART NO.	MODEL NO.	POWER SUPPLY
MAXICHARGER HOME 40A	MC40AP14S	MAXI US AC W10-N14	NEMA 14-50 PLUG ⚡	MAXICHARGER HOME 40A	MC40AP14I	MAXI US AC W10-N14-H	NEMA 14-50 PLUG ⚡
MAXICHARGER HOME 40A	MC40AP6S	MAXI US AC W10-N6	NEMA 6-50 PLUG ⚡	MAXICHARGER HOME 40A	MC40AP6I	MAXI US AC W10-N6-H	NEMA 6-50 PLUG ⚡
MAXICHARGER HOME 50A	MC50AHS	MAXI US AC W12	HARDWIRED	MAXICHARGER HOME 50A	MC50AHI	MAXI US AC W12-H	HARDWIRED

